
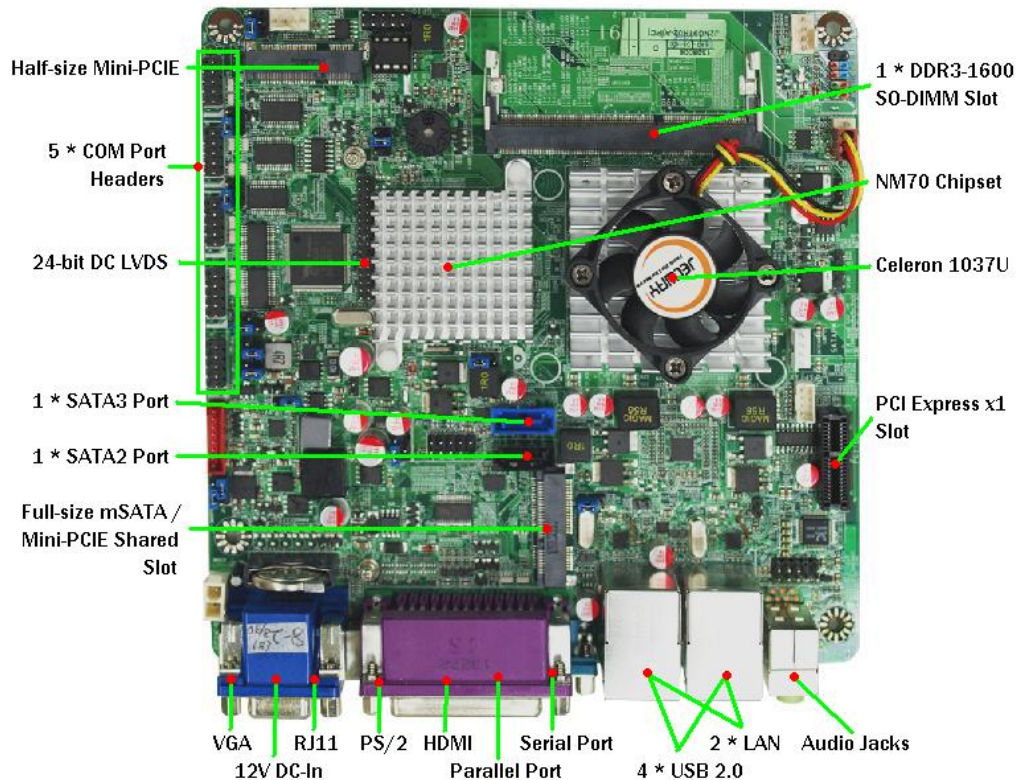
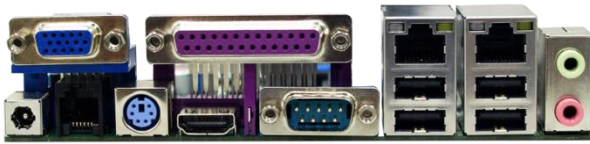


# NC9T-1037

## Mini-ITX Industrial Motherboard for Point of Sale Celeron 1037U / 6 COM / LPT / RJ-11 / 2 LAN

### Features

1. Industrial Motherboard Designed for Point of Sale (POS) Systems with Planned Lifecycle Through Q1'2015
2. Intel Celeron 1037U Dual core Processor, 1.8GHz, Ivy Bridge Class, 22nm, 17W, , Intel NM70 Chipset
3. Supports DDR3 1600 SODIMM up to 8GB Total
4. HDMI, VGA and 24 bit Dual Channel LVDS Ports
5. Intel HD Graphics Supporting up to 2 Displays
6. 1 \* SATA3 6Gb/s port, 1 \* SATA2 3Gb/s port
7. 1 \* Full size mSATA/mini PCIE Shared Slot
8. 1 \* PCI Express x1 Slot, 1 \* Half size Mini PCIE Slot
9. Parallel Port, Serial Ports, PS/2 Keyboard/Mouse Port
10. RJ11 Jack with +12V/+24V Power for Cash Drawers
11. Dual Gigabit LAN, 2 CH Audio, Watchdog Timer
12. Built in +12V DC or Internal 2 pin +12V Power Connector
13. Compatible with Win XP, Win 7, Win 8, Linux
14. Mini ITX Form Factor (170mm x 170mm)

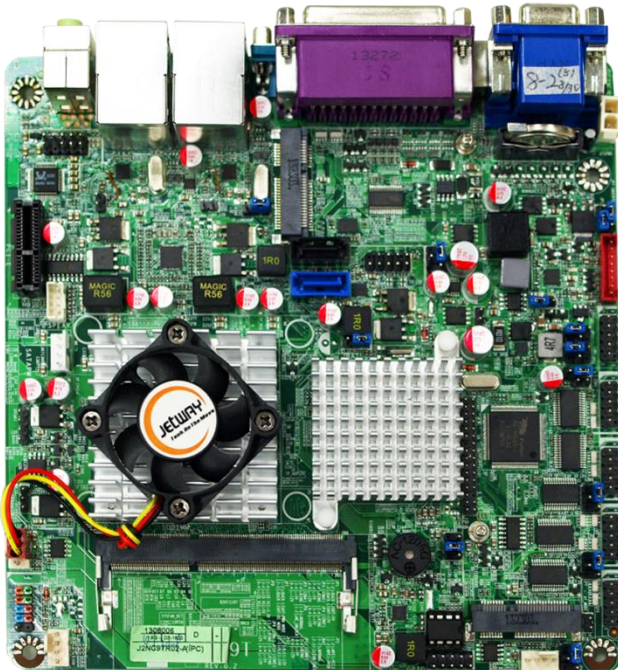

[www.ibtpanelpc.com](http://www.ibtpanelpc.com)

eMail: [info@ibtpanelpc.com](mailto:info@ibtpanelpc.com) **iBT Technologies inc.**  
Toll Free: 1(866) 590-4288 Tel. (514) 832-0808 Fax. (514) 832-0128

<b>Model / Series</b>	■ NC9T
<b>Part No</b>	■ JNC9T-1037
<b>Processor</b>	■ Intel Celeron 1037U Dual-core Processor, 1.8GHz, Ivy Bridge Class, 22nm, 17W
<b>Chipset</b>	■ Intel NM70 Chipset
<b>Video</b>	■ Intel HD Graphics in processor, up to 2 displays
<b>Memory</b>	■ 1 * 204-pin SO-DIMM slot supporting DDR3-1600/1333 up to 8GB total
<b>Expansion Slots</b>	■ 1 * PCI Express x1 slot ■ 1 * Half-size Mini-PCI Express card slot
<b>Storage</b>	■ 1 * SATA3 6Gb/s port, 1 * SATA2 3Gb/s port ■ 1 * Full-size mSATA/mini-PCI Express shared slot
<b>Audio</b>	■ Realtek ALC662 2 Channel HD Audio
<b>Network</b>	■ 2 * Realtek RTL8111G Gigabit LAN
<b>Other Features</b>	■ ACPI S3, AHCI, CPU Smart FAN, Watchdog Timer 10-255 min/sec, AT/ATX Power mode
<b>Rear Panel I/O</b>	■ 4 * USB 2.0 Ports ■ 2 * RJ-45 Ports ■ 1 * Serial Ports (RS232/422/485, +5V/+12V), Parallel port ■ 1 * HDMI, 1 * VGA, 1 * PS/2 Keyboard/Mouse port ■ 1 * RJ-11 port (+12V/+24V) ■ 2 * Audio Jacks (Line Out, Mic In) ■ +12V DC-In jack
<b>Internal I/O</b>	■ 1 * USB Headers for 2 * USB 2.0 Ports ■ 5 * Serial Port Headers (RS232, +5V/+12V) ■ 24-bit Dual channel LVDS connector & Inverter ■ Chassis Intrusion Header ■ 2-pin +12V Alternate Power connector
<b>BIOS</b>	■ AMI UEFI 32MB DIP Flash ROM
<b>Box Contents</b>	■ NC9T Motherboard, SATA Cables, Manual, DVD Driver Disk, I/O Shield
<b>Certification</b>	■ CE, FCC, RoHS, ErP
<b>Temperature</b>	■ Operating Temperature 0~40 ° C, Storage Temperature -20-85 ° C
<b>Form Factor</b>	■ Mini-ITX Form Factor (170mm x 170mm)
<b>Warranty</b>	■ 2 Years Limited Warranty

\*Specifications subject to change without notice, not responsible for typographical errors.



[www.ibtpanelpc.com](http://www.ibtpanelpc.com)

eMail: [info@ibtpanelpc.com](mailto:info@ibtpanelpc.com) **iBT Technologies inc.**  
Toll Free: 1(866) 590-4288 Tel. (514) 832-0808 Fax. (514) 832-0128